


**AFTER COOLER
 WATER COOLED**

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> Wide range of 15 standard models with capacities from 50 m3/hr. To 6000 m3/hr. Higher capacities - available on request Compact design Cooler in accordance with international design code like- TEMA-C, ASME, IS-2825. Duly tested – pneumatically & hydrostatically 	<ul style="list-style-type: none"> Auto drain valve 	<ul style="list-style-type: none"> Water Inlet Temperature : 32°C (Max.) Water Outlet Temperature : 38°C Water Inlet Pressure : 3 – 4 kg/cm2(g) Air Inlet Pressure : 7 – 12 kg/cm2(g) Air Inlet Temperature : 60°C Air Outlet Temperature : 40°C

SPECIFICATION SHEET

MODEL NO.	CAPACITY IN M3/HR	DIMENSIONS (IN MM)		CONNECTION (IN MM)		WATER QTY. IN LPM
		ØD	H~	AIR	WATER	
				N1 & N2	N3 & N4	
AC-50	50	65	1550	20	15	5
AC-100	100	80	1560	25	20	10
AC-250	250	125	1580	40	15	25
AC-500	500	150	1600	50	20	50
AC-750	750	150	1600	50	32	75
AC-1000	1000	150	1800	80	40	100
AC-1250	1250	150	2265	80	40	125
AC-1500	1500	200	1700	100	50	150
AC-1750	1750	200	2000	100	50	175
AC-2000	2000	200	2300	100	50	200
AC-2500	2500	250	1875	100	65	250
AC-3000	3000	250	2340	100	65	300
AC-3500	3500	250	2490	150	80	350
AC-4500	4500	300	2350	150	80	450
AC-6000	6000	300	2350	150	100	600

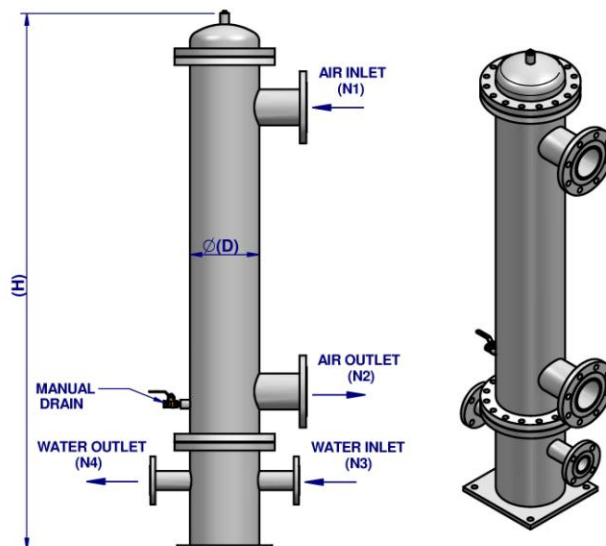

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE