

**TECHNICAL
SPECIFICATION**


BULLETIN NO. : DAI:AR-400-1.3
EFFECTIVE : APRIL 01, 2016
SUPERCEDES : DAI:AR-400.1.2
DATED : MAY 01, 2008

**AIR RECEIVER
WITHOUT HOLE**

| SPECIAL FEATURES | OPTIONAL FEATURES | STD. WORKING PARAMETERS |
|---|---|--|
| <ul style="list-style-type: none"> Wide range of 11 standard models Capacities from 0.5 m3 to 15.0 m3. Higher capacities - available on request Compact design Receivers in accordance with delair standard design code. Instrumentation such as - pressure gauge, safety relief valve, manual drain etc. with receiver. Duly tested - pneumatically & hydrostatically | <ul style="list-style-type: none"> Auto drain valve Construction according to other various codes | <ul style="list-style-type: none"> Pressure : 7.0 Kg/Cm2(g) Temperature : Up to 60 Deg. C <p>Note : For other working conditions please contact factory.</p> |

SPECIFICATION SHEET

| MODEL NO. | CAPACITY IN M3 | DIMENSIONS (IN MM) | | CONNECTION (IN MM) | WEIGHT (IN KG) |
|-----------|----------------|--------------------|------|--------------------|----------------|
| | | ØD | H~ | | |
| REC-0.5 | 0.5 | 700 | 1915 | 50 | 215 |
| REC-1.0 | 1.0 | 850 | 2385 | 50 | 365 |
| REC-1.5 | 1.5 | 1050 | 2440 | 50 | 475 |
| REC-2.0 | 2.0 | 1150 | 2570 | 50 | 535 |
| REC-3.0 | 3.0 | 1150 | 3590 | 65 | 710 |
| REC-4.0 | 4.0 | 1300 | 3635 | 65 | 815 |
| REC-5.0 | 5.0 | 1350 | 4180 | 65 | 960 |
| REC-6.0 | 6.0 | 1500 | 4135 | 80 | 1370 |
| REC-7.5 | 7.5 | 1600 | 4275 | 100 | 1520 |
| REC-10.0 | 10.0 | 1850 | 4420 | 100 | 2250 |
| REC-15.0 | 15.0 | 2250 | 4530 | 150 | 3375 |

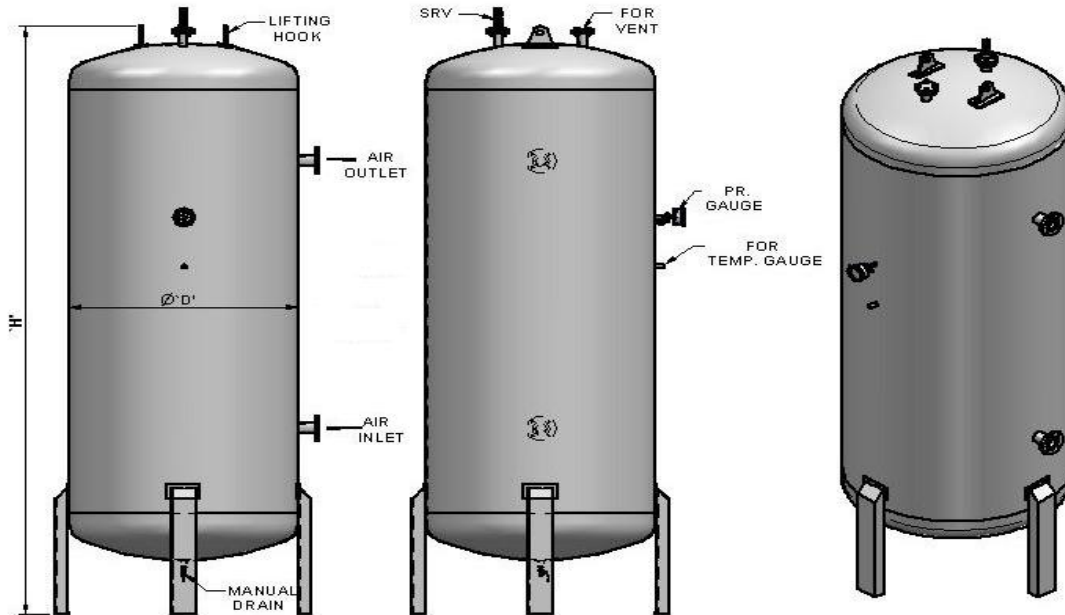

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE