


**REFRIGERATION DRYER
FDI DELPET SERIES**

FDI DELPET SERIES REFRIGERATION DRYER DRIED AIR CONTINUOUSLY COME STANDARD WITH

SPECIAL FEATURES	OPTIONAL FEATURES
Available in 14 standard models Capacities from 10.6 cfm to 500 cfm Mimic display to readout colour dew point status Unique, patented, foamed in heat exchanger Outperforms other dryers. Certified and reliable performance Compact design	Filters and/or total dryer by pass line with valves. Special delair filters for removal of water, oil mists, oil vapour and dust particles with electronically operated drain valves Explosion proof controls for offshore application

Specification Sheet for FDI Delpet Series Refrigeration Dryer

MODEL	CAPACITY			DIMENSIONS (IN MM)			APPROX. WT. (IN KG.)	AIR CONN. (IN INCHES)	CONN. LOAD IN KW
	CFM	CMH	Ltr./SEC.	L	W	H			
FDI-P-18 A	10.6	18	5	880	465	700	90	1/2" BSP.	0.3
FDI-P-54 A	32	54	15	880	465	700	90	1/2" BSP.	0.55
FDI-P-110 A	65	110	30	880	465	700	100	3/4" BSP.	0.69
FDI-P-150 A	88	150	40	1186	465	915	185	1.1/4" BSP.	0.69
FDI-P-180 A	106	180	50	1186	465	915	185	1.1/4" BSP.	0.69
FDI-P-220 A	130	220	60	1186	465	915	185	1.1/4" BSP.	0.69
FDI-P-290 A	170	290	80	1420	600	1035	230	2" BSP.	0.75
FDI-P-360 A	212	360	100	1420	600	1035	250	2" BSP.	1.64
FDI-P-430 A	254	430	119	1420	600	1035	250	2" BSP.	1.64
FDI-P-540 A	318	540	150	1420	600	1035	250	2" BSP.	1.95
FDI-P-540 W	318	540	150	1420	600	1085	350	2" BSP.	1.44
FDI-P-600 W	355	600	167	1420	600	1085	350	2" BSP.	1.44
FDI-P-720 W	424	720	200	1420	600	1085	350	2" BSP.	1.75
FDI-P-850 W	500	850	236	1480	900	1270	400	3" F	1.75

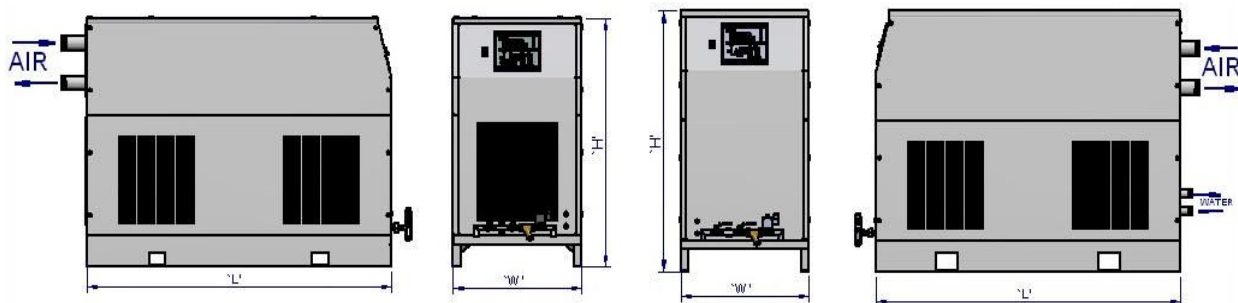

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE