


**REFRIGERATION DRYER
FDI GOLD SERIES**

FDI GOLD SERIES REFRIGERATION DRYER DRIED AIR CONTINUOUSLY COME STANDARD WITH

| SPECIAL FEATURES | OPTIONAL FEATURES |
|---|--|
| Available in 20 Standard models Capacities from 10.6 cfm to 996 cfm Mimic display to readout colour dew point status Unique, patented, foamed in heat exchanger Outperforms other dryers. Certified and reliable performance Compact design | Filters and/or total dryer by pass line with valves. Special delair filters for removal of water, oil mists, oil vapour and dust particles with electronically operated drain valves Explosion proof controls for offshore application |

Specification Sheet for FDI Gold Series Refrigeration Dryer

| MODEL | CAPACITY | | | DIMENSIONS (IN MM) | | | APPROX. WT. (IN KG.) | AIR CONN. (IN INCHES) | CONN. LOAD IN KW |
|--------------|----------|------|-----------|--------------------|------|------|----------------------|-----------------------|------------------|
| | CFM | CMH | Ltr./SEC. | L | W | H | | | |
| FDI-G-18 A | 10.6 | 18 | 5 | 880 | 465 | 700 | 90 | 1/2" BSP. | 0.30 |
| FDI-G-54 A | 32 | 54 | 15 | 880 | 465 | 700 | 90 | 1/2" BSP. | 0.55 |
| FDI-G-110 A | 65 | 110 | 30 | 880 | 465 | 700 | 100 | 3/4" BSP. | 0.69 |
| FDI-G-150 A | 88 | 150 | 40 | 1186 | 465 | 915 | 185 | 1.1/4" BSP. | 0.69 |
| FDI-G-180 A | 106 | 180 | 50 | 1186 | 465 | 915 | 185 | 1.1/4" BSP. | 0.69 |
| FDI-G-220 A | 130 | 220 | 60 | 1186 | 465 | 915 | 185 | 1.1/4" BSP. | 0.69 |
| FDI-G-290 A | 170 | 290 | 80 | 1420 | 600 | 1035 | 230 | 2" BSP. | 0.75 |
| FDI-G-360 A | 212 | 360 | 100 | 1420 | 600 | 1035 | 250 | 2" BSP. | 1.64 |
| FDI-G-430 A | 254 | 430 | 119 | 1420 | 600 | 1035 | 250 | 2" BSP. | 1.64 |
| FDI-G-540 A | 318 | 540 | 150 | 1420 | 600 | 1035 | 250 | 2" BSP. | 1.95 |
| FDI-G-540 W | 318 | 540 | 150 | 1420 | 600 | 1085 | 350 | 2" BSP. | 1.44 |
| FDI-G-600 W | 355 | 600 | 167 | 1420 | 600 | 1085 | 350 | 2" BSP. | 1.44 |
| FDI-G-720 W | 424 | 720 | 200 | 1420 | 600 | 1085 | 350 | 2" BSP. | 1.75 |
| FDI-G-850 W | 500 | 850 | 236 | 1480 | 900 | 1270 | 400 | 3" F | 1.75 |
| FDI-G-970 W | 572 | 970 | 270 | 1480 | 900 | 1270 | 400 | 3" F | 1.75 |
| FDI-G-1060 W | 624 | 1060 | 295 | 1480 | 1000 | 1250 | 500 | 3" F | 2.35 |
| FDI-G-1150 W | 678 | 1150 | 320 | 1480 | 1000 | 1250 | 500 | 3" F | 2.35 |
| FDI-G-1270 W | 749 | 1270 | 353 | 1480 | 1000 | 1250 | 500 | 3" F | 2.35 |
| FDI-G-1350 W | 795 | 1350 | 375 | 1480 | 1000 | 1250 | 500 | 3" F | 2.35 |
| FDI-G-1690 W | 996 | 1690 | 469 | 2400 | 1000 | 1610 | 800 | 4" F | 3.30 |

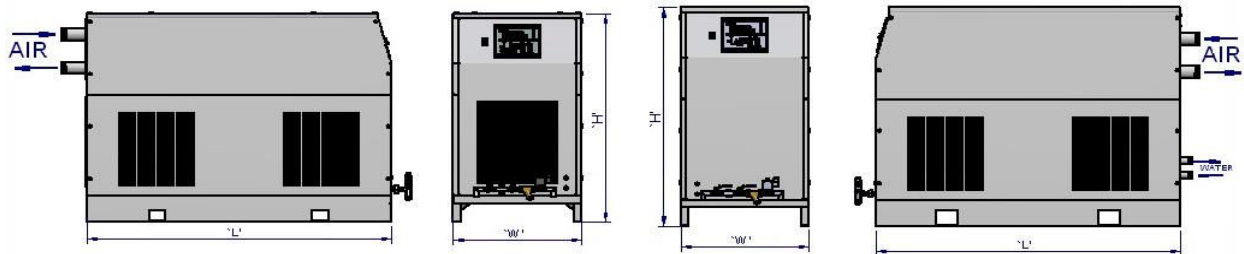

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE