


## AIR RECEIVER WITH INSPECTION HOLE

AIR RECEIVER STANDARD WITH

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> <li>Wide range of 11 standard models</li> <li>Capacities from 0.5 m3 to 15.0 m3.</li> <li>Higher capacities - available on request</li> <li>Compact design.</li> <li>Receivers in accordance with delair standard design code.</li> <li>Instrumentation such as - pressure gauge, safety relief valve, manual drain etc. With receiver.</li> <li>Duly tested - pneumatically &amp; hydrostatically</li> </ul>	<ul style="list-style-type: none"> <li>Auto drain valve</li> <li>Construction according to other various codes</li> </ul>	<ul style="list-style-type: none"> <li>Pressure :- 7.0 Kg/Cm2(g)</li> <li>Temperature :- Upto 60 Deg. C</li> <li>* Note :- For other working conditions please contact factory.</li> </ul>

### Specification Sheet for Air Receiver with Inspection Hole

MODEL NO.	CAPACITY IN M3	DIMENSIONS ( IN MM )		CONNECTION ( IN MM )	WEIGHT ( IN KG )
		D	H		
REC-0.5	0.5	700	1915	50	240
REC-1.0	1.0	850	2385	50	390
REC-1.5	1.5	1050	2440	50	500
REC-2.0	2.0	1150	2570	50	560
REC-3.0	3.0	1150	3590	65	735
REC-4.0	4.0	1300	3635	65	840
REC-5.0	5.0	1350	4180	65	990
REC-6.0	6.0	1500	4135	80	1400
REC-7.5	7.5	1600	4275	100	1550
REC-10.0	10.0	1850	4420	100	2280
REC-15.0	15.0	2250	4530	150	3400

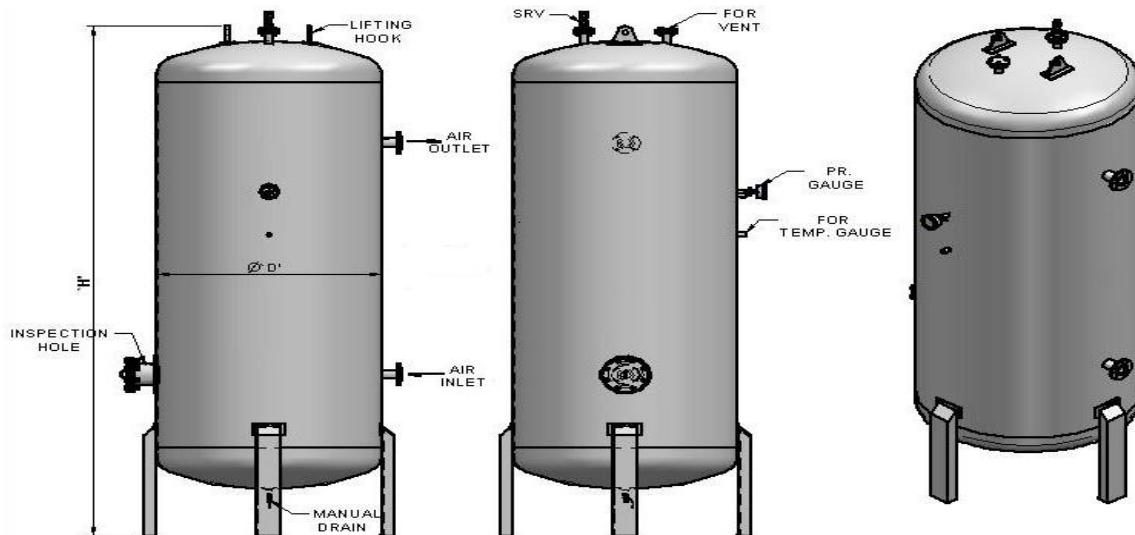

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE