


**HEATLESS DRYER
 DD DELPET™ SERIES**

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> Wide range of 4 Standard models with capacities from 34.7 m3/hr. To 104 m3/hr. higher capacities are available on request Atmospheric dew point achievable (-) 40°C and below Electronic controls/solid state timers for automatic and reliable operation Low power consumption Equipped with muffler on purge air outlet to reduce noise level Specially graded desiccant Delsorb™ 10 for optimum performance and long life 	<ul style="list-style-type: none"> Humidity indicator Filters and/or total dryer bypass line with valves. Special delair filters for removal of water, oil mists, oil vapour and dust particles with electronically operated drain valves Explosion proof controls for offshore application Construction according to various codes 	<ul style="list-style-type: none"> Working Pressure : 25 to 40 kg/cm2(g) Air inlet temperature : 40°C Ambient temperature : 40°C <p>Note : For other working conditions please contact factory.</p>

SPECIFICATION SHEET

MODEL No.	CAPACITY IN M3/HR. PRESSURE IN BAR (G)				CONNECTION (IN INCHES)	DIMENSIONS (IN MM)			WEIGHT (IN KG)
	25	30	35	40		L	W	H~	
DD-P-55	34.7	41.33	48	54.7	½" FLANGE	730	850	1500	200
DD-P-75	46.30	55.2	64.1	73	½" FLANGE	730	850	1700	220
DD-P-110	69.44	82.8	96.14	109.5	½" FLANGE	760	850	1700	270
DD-P-170	104	124	144	164	½" FLANGE	800	850	1700	320

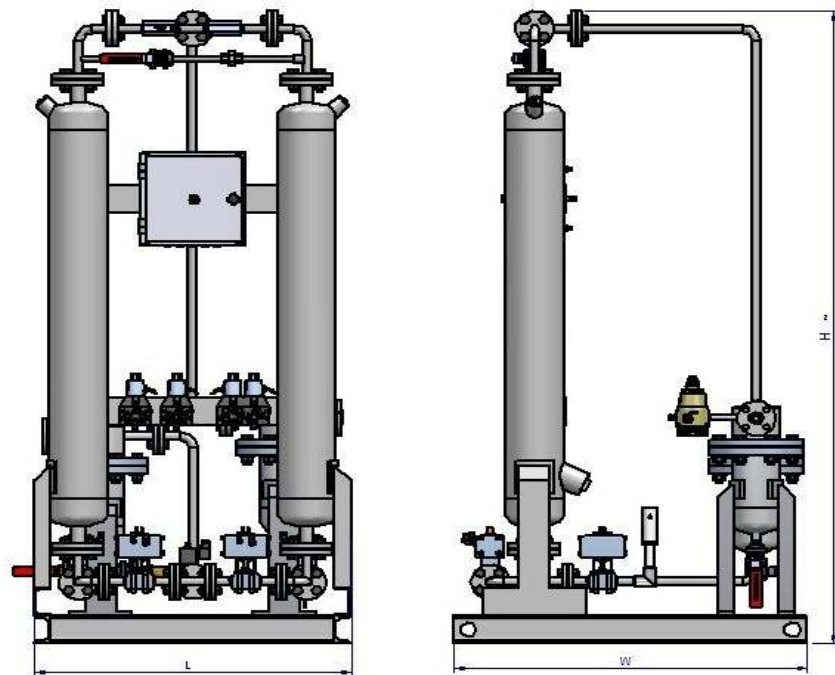

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE