


AIR RECEIVER

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> Wide range of 11 standard models Capacities from 0.5 m3 to 15.0 m3. Higher capacities - available on request Compact design Receivers in accordance with international design code like - ASME, IS-2825, etc. Instrumentation such as – pressure gauge, safety relief valve, manual drain etc. with receiver. Duly tested – pneumatically & hydrostatically 	<ul style="list-style-type: none"> Auto drain valve Construction according to other various codes With Man hole With inspection hole Without man / inspection hole <p>Note : For other working conditions please contact factory.</p>	<ul style="list-style-type: none"> Pressure : 7.0 Kg/Cm2(g) Temperature : Up to 60 Deg. C <p>Note : For other working conditions please contact factory.</p>

SPECIFICATION SHEET

MODEL NO.	CAPACITY IN M3	DIMENSIONS (IN MM)		CONNECTION (IN MM)	WEIGHT (IN KG)
		ØD	H~		
REC-0.5	0.5	700	1915	50	275
REC-1.0	1.0	850	2385	50	420
REC-1.5	1.5	1050	2425	50	600
REC-2.0	2.0	1000	3260	50	700
REC-3.0	3.0	1150	3580	65	1035
REC-4.0	4.0	1300	3655	65	1200
REC-5.0	5.0	1350	4180	65	1360
REC-6.0	6.0	1500	4100	80	1735
REC-7.5	7.5	1600	4275	100	2000
REC-10.0	10.0	1850	4420	100	2800
REC-15.0	15.0	2250	4530	150	4030

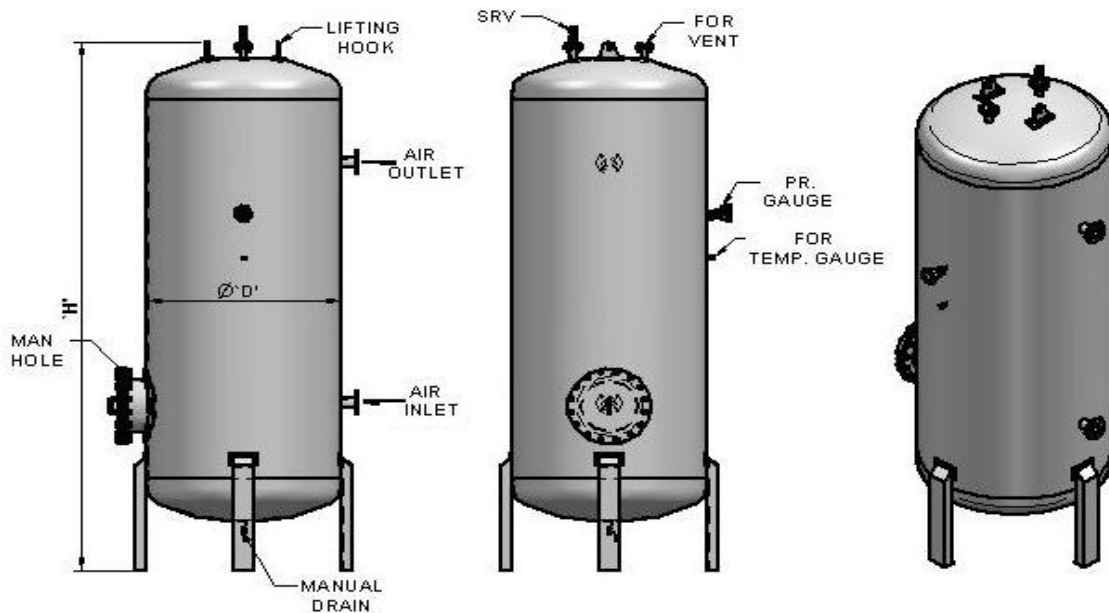

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE