


**REFRIGERATION DRYER
FDI PLATINUM SERIES**

FDI PLATINUM SERIES REFRIGERATION DRYER DRIED AIR CONTINUOUSLY COME STANDARD WITH

SPECIAL FEATURES	OPTIONAL FEATURES
Available in 28 standard models Capacities from 10.6 cfm to 3540 cfm Mimic display to readout dew point, operating status, faults indication Provides pressure dew points down to 4°C Unique, patented, foamed in heat exchanger Outperforms other dryers. Certified and reliable performance Compact design	Filters and/or total dryer bypass line with valves. Special delair filters for removal of water, oil mists, oil vapour and dust particles with electronically operated drain valves Explosion proof controls for offshore application

Specification Sheet for FDI Platinum Series Refrigeration Dryer

MODEL	CAPACITY			DIMENSIONS (IN MM)			APPROX. WT. (IN KG.)	AIR CONN. (IN INCHES)	CONN. LOAD IN KW
	CFM	CMH	Ltr./SEC.	L	W	H			
FDI-18 A	10.6	18	5	880	465	700	90	1/2" BSP.	0.30
FDI-54 A	32	54	15	880	465	700	90	1/2" BSP.	0.55
FDI-110 A	65	110	30	880	465	700	100	3/4" BSP.	0.75
FDI-150 A	88	150	40	1186	465	915	185	1.1/4" BSP.	0.75
FDI-180 A	106	180	50	1186	465	915	185	1.1/4" BSP.	0.75
FDI-220 A	130	220	60	1186	465	915	185	1.1/4" BSP.	0.75
FDI-290 A	170	290	80	1420	600	1035	230	2" BSP.	0.75
FDI-360 A	212	360	100	1420	600	1035	250	2" BSP.	1.64
FDI-430 A	254	430	119	1420	600	1035	250	2" BSP.	1.64
FDI-540 A	318	540	150	1420	600	1035	250	2" BSP.	1.95
FDI-540 W	318	540	150	1420	600	1085	350	2" BSP.	1.44
FDI-600 W	355	600	167	1420	600	1085	350	2" BSP.	1.44
FDI-720 W	424	720	200	1420	600	1085	350	2" BSP.	1.75
FDI-850 W	500	850	236	1480	900	1270	400	3" F	1.75
FDI-970 W	572	970	270	1480	900	1270	400	3" F	1.75
FDI-1060 W	624	1060	295	1480	1000	1250	500	3" F	2.35
FDI-1150 W	678	1150	320	1480	1000	1250	500	3" F	2.35
FDI-1270 W	749	1270	353	1480	1000	1250	500	3" F	2.35
FDI-1350 W	795	1350	375	1480	1000	1250	500	3" F	2.35
FDI-1690 W	996	1690	469	2400	1000	1610	800	4" F	3.30
FDI-1910 W	1124	1910	530	2400	1000	1610	850	4" F	3.55
FDI-2160 W	1271	2160	600	2400	1000	1610	1050	4" F	4.45
FDI-2550 W	1500	2550	708	2400	1000	1610	1500	4" F	6.10
FDI-2880 W	1695	2880	800	2400	1000	1610	1700	4" F	6.10
FDI-3000 W	1770	3000	833	2400	1000	1610	1800	4" F	6.10
FDI-3340 W	1971	3340	930	2400	1550	1630	2500	6" F	6.60
FDI-4310 W	2543	4310	1200	2400	1550	1630	2800	6" F	8.90
FDI-6000 W	3540	6000	1665	3150	1750	1630	3000	8" F	12.2

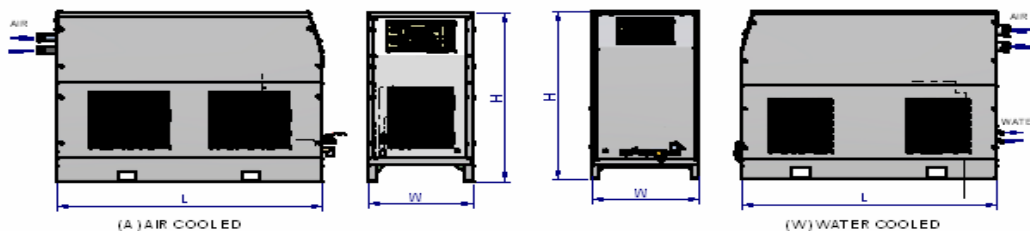

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE